

SUN ODYSSEY

44

Technical Data 08/91


Specifications

Length over all	: 13,33 m (43' 9")
Hull length	: 13,10 m (43')
Length on waterline	: 10,60 m (34' 9")
Maximum beam	: 4,23 m (13' 10.5")
Deep fin draft	: 2,12 m (6' 11.5")
Shallow fin draft	: 1,50 / 2,53 m (4' 11" / 8' 3.5")
Ballast weight	: 3650 kgs/4150 kgs approx.
Displacement	: 10 tonnes approx. (22050 lbs)
N° of cabins	: 2/3/4
N° of berths	: 11/6
N° of washrooms	: 2
Homologation	: 8/10/12

Sail areas

Mainsail	: 32,70 m ² (352 sq. ft.)
Genoa	: 58,70 m ² (632 sq. ft.)
Spinnaker	: 128,30 m ² (1381 sq. ft.)

Designer : Daniel ANDRIEU
Decoration coordinated by Andrew Winch Designs



Jeanneau

4-CABIN VERSION

Forward cabin

Double berth 1,95 m x 2,00 m (6' 4.5" x 6' 6.5")
 Mattress with removable fabric covers
 Mattress thickness : 10 cm (4")
 Compartmented stowage lockers beneath berth
 2 storage drawers at bedhead
 Stowage unit at bedhead starboard side comprising hanging locker and shelf with door
 Lateral stowage shelf to port and starboard
 Hulllining : rotproof fabric above stowage shelves
 Headlining : Light-coloured rotproof fabric
 Opening deck port with ventilator
 Night blind
 Dome ceiling light
 Bedhead spotlight to starboard
 220-volt power socket
 Carpet-covered sole
 Separating door from the gangway with louvred air vent and door-blocking device in open position
 Stainless steel babystay chainplate tie-bar
 Headroom : 1,87 m (6' 1.5")

Forward cabin portside

2 single-berth bunks 2,00 x 0,70 m (6' 6.5" x 2' 3.5")
 Mattress with removable fabric covers
 Mattress thickness : 10 cm (4")
 Natural lighting and ventilation through 1 opening deck hatch with night blind
 Opening hull port with curtain/drape
 1 hanging locker with fiddle
 1 dome ceiling light
 2 bedhead spotlights
 Hulllining : light-coloured rotproof fabric
 Headlining : light-coloured rotproof fabric
 Continuous ventilation through dorad vent
 Sole of removable teak panels with pale grooving
 Separating door with louvred air vent leading into the gangway
 Headroom : 1,87 m (6' 1.5")

Forward head

GRP laminate unit comprising 1 stainless steel wash-basin Ø 30 cm (1')
 Stainless steel mixer tap/faucet with pressurised hot and cold water supply
 Grab-rail with built-in towel-rail
 Stowage locker under the washbasin allowing access to cocks
 Clothes hook
 Mirror
 Marine WC with pump
 Shower cabin closed off with a curtain/drape
 GRP seat
 GRP inner liner for drainage of shower waste water
 Teak duckboarding
 Discharge hand-pump
 Dome ceiling light
 Striplight
 12-volt power socket
 Natural lighting and ventilation through opening deck hatch
 Night blind
 Opening hull port with curtain/drape
 Continuous ventilation through dorad vent
 Access to the cable-run sheath for the passage of mast cables
 Separating door with louvred air vent leading into the gangway
 Headroom : 1,87 m (6' 1.5")

Companionway

Translucent companionway washboards
 Teak grab-rail
 Translucent sliding-hatch
 4 companionway steps with non-slip treads
 4 circuit-breakers
 Access to engine
 Headroom : 1,93 m (6' 4")

Galley

Functional appointment to starboard facing the saloon
 Teak-worked galley unit with pale laminate for work surface
 Stainless steel grabrail in front of the sink and stove/oven
 Retaining strap
 Double-sink 0,23 x 0,34 m and 0,30 x 0,34 m (9" x 1' 1" & 1' x 1")
 Mixer tap/faucet with pressurised hot and cold water supply
 Sea water supply by foot pump
 2 sink-boards doubling as work surface and cutting-board
 Striplight over the sinks
 Crockery unit over the cooker with adjustable shelving pins and shelf at top of crockery unit with fiddle
 Stowage shelf behind the sink
 Stowage lockers under the sink with waste-bin, 2 doors each with louvred air vent affording easy access to : gas shut-off cock, 4 cocks, refrigeration-unit compressor, thermostat
 Removable work surface over the cooker hob
 Stowage space with folding leaf under the cooker and access to foot pump
 150-litre refrigerator (33 imp.galls/39.63 US galls) with evaporator and stowage bin
 Ice-box light
 Ice-box door is lockable
 60 mm thick (2.5") injected polyurethane foam insulation
 Hullining : light-coloured rotproof fabric
 Hull port with curtain/drape
 Dorad vent ventilation
 12-volt power socket
 220-volt power socket
 Roof ports with curtains/drapes
 Headroom : 1,93 m (6' 4")
 Crumb-tray
 10-setting crockery/cutlery service

Saloon

Ergonomic settee seating round the table, seat and backrest cushions have removable fabric covers
 Saloon table 0,95 m x 1,20 m (3' 1" x 3' 11")
 Stowage drawer under the table
 Cushion thickness : 14 cm (5.5")
 2 table legs with support (double berth option)
 Compartmented stowage lockers beneath the settee seating
 Grab-rail built into the backrest
 Lateral stowage shelving with bar
 Acoustic speakers
 Hulllining : light-coloured rotproof fabric
 Headlining : light-coloured rotproof fabric
 2 opening hull ports with curtain/drape
 Mast pillar
 Opening deck hatch with vent
 Night blind
 Roof ports with curtains/drapes
 Solid teak grab-rail under below the ports
 2 lateral soft-lighting spots
 4 striplights set into the ceiling with switch under the chart table
 Water tanks under the sole
 Sole of removable grooved-teak panels with pale grooving
 Numerous inspection hatches give access to the bilge (tank)
 Headroom : 1,93 m (6' 4")

Navigation station

Chart table 0,66 x 0,90 m (2' 2" x 3')
 Directable reading spotlight
 Swing-out panel to house the navigational instrumentation
 Stowage bin
 Bookshelving
 Large stowage locker under the chart table with door
 Stowage space under the navigator seat with folding leaf
 Navigator seat is battened and shaped with teak and has a fixed cushion backrest the seat part being removable
 Cushions have removable fabric covers
 Switch covering saloon striplights is under chart table
 Huge oilskins locker
 Stereo cassette player with speakers in the saloon
 Roof port with curtain/drape
 Headroom : 1,93 m (6' 4")

Electrics panel

Panel is mounted on a hinged door
 Visual identification of the boat's various electrical points
 20 thermostatic circuit-breakers and switches covering each electrical function : sailing lights, electronics, pumps, interior lighting, supply
 4 thermostatic circuit-breakers covering the boat's lighting
 Thermostatic circuit-breaker covering refrigeration unit
 12-volt power socket of cigarette-lighter type
 Ammeter
 Voltmeter
 Water meter
 Battery-charge tester
 4 battery cut-outs in companionway
 Electronic load dispatcher
 Switch and circuit-breaker for the electric water heater

Aft cabin starboard side


Double berth 2,00 x 1,40 m (6' 6.5" / 4' 7")
 Diesel tank access to the fuel circuit cock
 Access to steering
 Stowage locker under berth
 Single upper bunk berth in midships part of cabin hull-side 0,67 x 1,85 m (2' 2" x 6' 1")
 Stowage unit beneath berth with hanging locker and shelf
 Dome ceiling light above double berth
 Reading spotlight above the single bunk
 Hulllining : light-coloured rotproof fabric
 Headlining : light-coloured rotproof fabric
 Wash-basin unit with hot and cold water
 Wash-basin diam. : 30 cm (1') with stainless steel tap/faucet
 Handy shelf with fiddles
 220-volt power socket
 Dome ceiling light above wash-basin
 Opening hull port with curtain/drape
 Opening roof port with curtain/drape
 Opening deck port
 Night blind
 Continuous ventilation through dorad vent
 Carpet-covered sole
 Access to hot water tank, batteries and cocks via lockable door
 Access door through to saloon
 Headroom : 1,88 m

Aft cabin portside

Double berth 2,00 x 1,40 m (6' 6.5" / 4' 7")
 Mattress with removable fabric covers
 Mattress thickness : 10 cm (4")
 Stowage locker beneath the berth
 Inspection-hatch access to stuffing-box and battery
 Small shelf-cum-table with fiddle
 220-volt power socket
 Dome ceiling light
 Access to engine
 Access to hot water tank
 Opening hull port with curtain/drape
 Opening roof port with curtain/drape
 Opening deck port
 Night blind
 Stowage unit with shelf and hanging locker
 Settee
 Stowage shelf
 Carpet-covered sole
 Bedhead spotlight
 Hulllining : rotproof fabric
 Headlining : light-coloured rotproof fabric
 Door leading to saloon with access-door to aft head portside
 Headroom : 1,87 m (6' 1.5")

After head

Moulded laminate unit comprising stainless steel wash-basin diam. 30 cm (1') with stainless steel tap/faucet
 Pressurised hot and cold water
 Marine WC with pump
 Grab-rail built into the unit
 Stowage locker beneath the wash-basin unit
 Toilet roll-holder
 Shower basin
 Drainage by hand-pump
 Opening hull port with curtain/drape
 2 stowage lockers with doors, mirror
 12-volt power socket
 Striplight
 Dome ceiling light
 Pressurised hot and cold water supply to shower
 Door leading to aft cabin and saloon with louvred air vent
 Headroom : 1,88 - (6' 2")

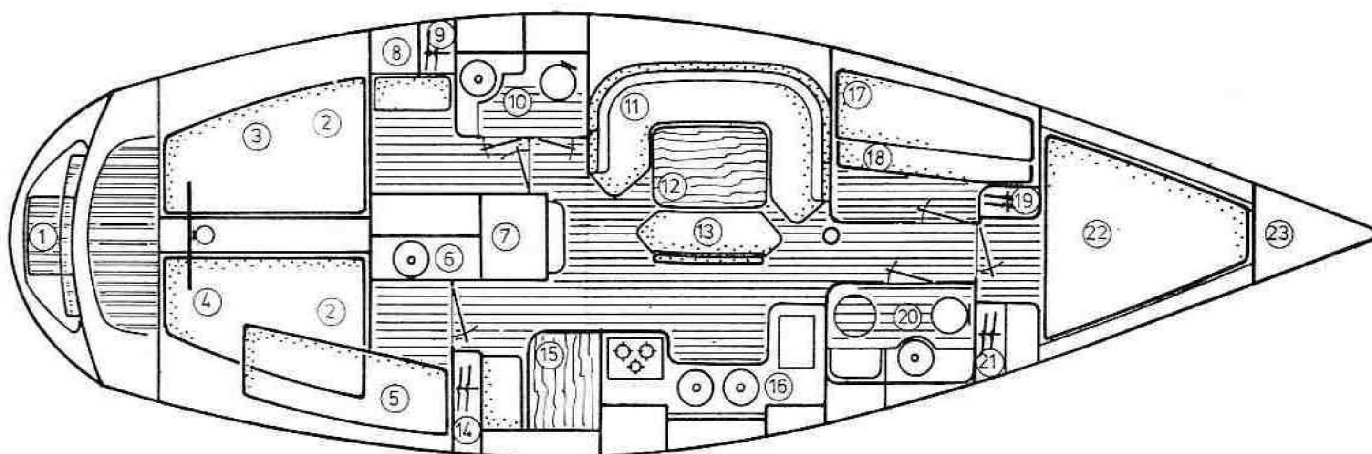

- | | | |
|---|-----------------------|--|
| 1 Teak-battened transom extension | 9 Hanging locker | 17 Single bunk berth |
| 2 Diesel tank compartment | 10 After head | 18 Single berth forward cabin portside |
| 3 Double berth aft cabin portside | 11 Saloon settee | 19 Stowage |
| 4 Double berth aft cabin starboard side | 12 Saloon table | 20 Forward head with shower |
| 5 Single bunk berth | 13 Saloon settee | 21 Hanging locker |
| 6 Washbasin aft cabin starboard side | 14 Hanging locker | 22 Double cabin forward |
| 7 Engine compartment | 15 Navigation station | 23 Chain locker |
| 8 Stowage unit with shelving aft cabin | 16 Galley | |

3-CABIN VERSION

Master cabin forward

Double berth 2,00 m x 1,48 m (6' 6,5" x 4' 10")
 Mattress with removable fabric covers
 Mattress thickness : 10 cm (4")
 Compartmented stowage lockers beneath berth
 2 storage drawers at headhead
 2 stowage units at behead comprising hanging locker and stowage space with shelf with door
 Seat in front of units with stowage locker under the cushion
 Lateral stowage shelf to port and starboard
 Hulllining : light-coloured rotproof fabric
 Headlining : light-coloured rotproof fabric
 Opening deck port with ventilator
 Night blind
 Dome ceiling light
 Bedhead spotlight to starboard
 220-volt power socket
 Sole with carpeting
 Access door to showerroom portside
 Access door to washroom starboardside
 Separating door from the saloon with louvred air vent
 Headroom 1,87 m (6' 1,5")

Forward head portside

GRP laminate unit comprising 1 stainless steel wash basin diam. : 30 cm (1')
 Stainless steel mixer tap/faucet with pressurised hot and cold water supply
 Grab-rail with built-in towel-rail
 Stowage locker under the washbasin allowing access to cocks
 Stowage unit over the washbasin with door
 Clothes hooks
 Mirror
 Shower with pressurised hot and cold water supply
 GRP seat with built-in soap-dish
 Mirror with small shelf and fiddle behind the washbasin
 GRP inner liner for drainage of shower waste water
 Teak duckboarding
 Discharge hand-pump
 Dome ceiling light
 Striplight
 12-volt power socket
 Natural lighting and ventilation through opening deck hatch
 Night blind
 Opening hull port with curtain/drape
 Ventilation through dorad vent
 Separating door to forward cabin
 Headroom 1,87 m (6' 1,5")

Companionway

Translucent companionway washboards
 Teak grab-rail
 Translucent sliding-hatch
 4 companionway steps with non-slip treads
 4 circuit-breakers
 Access to engine
 Headroom : 1,93 m (6' 4")

Toilet compartment to forward cabin starboard side

GRP laminate unit comprising 1 stainless steel washbasin diam. : 30 cm (1')
 Stainless steel tap/faucet with pressurised hot and cold water supply
 Stowage unit over the washbasin with door
 Grab-rail with built-in towel-rail
 Stowage locker under the washbasin allowing access to cocks
 Clothes hook
 Paper dispenser
 Marine WC with pump
 Mirror with small shelf and fiddle behind the washbasin
 GRP inner liner

Dome ceiling light
 Striplight
 12-volt power socket
 Natural lighting and ventilation through opening deck hatch
 Night blind
 Opening hull port
 Continuous ventilation through dorad vent
 Access to the cable-run sheath for the passage of mast cables
 Separating door to forward cabin
 Headroom 1,87 m (6' 1,5")

Saloon

Ergonomic settee seating round the table, seat and backrest cushions have removable fabric covers
 Saloon table 0,95 m x 1,20 m (3' 1" x 3' 11")
 Stowage drawer under the table
 Cushion thickness : 14 cm (5.5")
 2 table legs with support (double berth option)
 Compartmented stowage lockers beneath the settee seating
 Centre-board hydraulic mechanism under the settee galley side (L/K version) grab-rail is built into this backrest
 Lateral stowage shelving with bar
 Acoustic speakers
 Hulllining : light-coloured rotproof fabric
 Headlining : light-coloured rotproof fabric
 Opening hull port with curtain/drape
 Mast pillar
 Opening deck hatch
 Night blind
 Roof ports with curtains/drapes
 Solid teak grab-rail under below the ports
 2 lateral soft-lighting spots
 4 striplights set into the ceiling with switch under the chart table
 Water tanks under the sole
 Sole of removable grooved-teak panels with pale grooving
 Numerous inspection hatches give access to the bilge (tank)
 Headroom : 1,93 m (6' 4")

Navigation station

Chart table 0,66 x 0,90 m (2' 2" x 3')
 Directable reading spotlight
 Swing-out panel to house the navigational instrumentation
 Stowage bin
 Striplight over the chart table
 Bookshelving
 Large stowage locker under the chart table with door
 Stowage space under the navigator seat with folding leaf
 Navigator seat is battened and shaped with teak and has a fixed cushion backrest the seat part being removable
 Cushions have removable fabric covers
 Saloon/galley separating grab-rail
 Chart table
 Switch covering saloon striplights is under chart table
 Large oilskin locker
 Stereo cassette player with speakers in the saloon
 Roof port with curtain/drape
 Headroom : 1,93 m (6' 4")

Galley

Functional appointment to starboard facing the saloon
 Teak-worked galley unit with pale laminate for work surface
 Stainless steel grabrail
 Retaining strap
 Double-sink 0,23 x 0,34 m and 0,30 x 0,34 m (9" x 1' 1" & 1' x 1")
 Tap/faucet with pressurised hot and cold water supply
 Sea and fresh-water supplies by separate foot pumps
 2 sink-boards doubling as work surface and cutting-board
 Striplight over the sinks
 Crockery unit over the cooker with adjustable shelving pins and shelf at top of above crockery unit with fiddle
 Stowage shelf behind the sink
 Stowage lockers under the sink with waste-bin, 2 doors each with louvred air vent affording easy access to : gas shut-off cock, 4 cocks,

refrigeration-unit compressor, thermostat
 Removable work surface over the cooker hob
 Stowage space with folding leaf under the cooker and access to foot pump
 150-litre refrigerator (33 imp.galls/39.63 US galls) with evaporator and stowage bin
 Ice-box light
 Ice-box door is lockable
 60 mm thick (2.5") injected polyurethane foam insulation
 Hulllining : light-coloured rotproof fabric
 Hull port with curtain/drape
 Dorad vent ventilation
 12-volt power socket
 220-volt power socket
 Roof ports with curtains/drapes
 Headroom : 1,93 m (6' 4")
 Crumb-tray

Electrics panel

Panel is mounted on a hinged door
 Visual identification of the boat's various electrical points
 20 thermostatic circuit-breakers and switches covering each electrical function : sailing lights, electronics, pumps, interior lighting, supply
 4 thermostatic circuit-breakers covering the boat's lighting
 Thermostatic circuit-breaker covering refrigeration unit
 12-volt power socket of cigarette-lighter type
Ammeter
Voltmeter
Water meter
Battery-charge tester
 4 battery cut-outs in companionway
 Electronic load dispatcher
 Switch and circuit-breaker for the electric water heater

Aft cabin starboard side

Double berth 2,00 x 1,40 m (6' 6,5" / 4' 7")
 Diesel tank access to the fuel circuit cock
 Access to steering
 Stowage locker under berth
 Single upper bunk berth in midships part of cabin hull-side
 0,67 x 1,85 m (2' 2" x 6' 1")
 Stowage unit beneath berth with hanging locker and shelf
 Dome ceiling light above double berth
 Reading spotlight above the single bunk
 Hulllining : light-coloured rotproof fabric
 Headlining : light-coloured rotproof fabric
 Washbasin unit with hot and cold water
 Washbasin diam. : 30 cm (1') and stainless steel tap/faucet
 Mirror above washbasin
 Handy shelf with fiddles
 220-volt power socket
 Dome ceiling light above washbasin
 Opening hull port with curtain/drape


Opening roof port with curtain/drape
 Opening deck port
 Night blind
 Continuous ventilation through dorad vent
 Carpet-covered sole
 Access to hot water tank, batteries and cocks via lockable door
 Access door through to saloon
 Headroom : 1,88 m

Aft cabin portside

Double berth 2,00 x 1,40 m (6' 6,5" / 4' 7")
 Mattress with removable fabric covers
 Mattress thickness : 10 cm (4")
 Stowage locker beneath the berth
 Inspection-hatch access to stuffing-box and battery
 Small shelf-cum-table with fiddle
 220-volt power socket
 Round mirror
 Dome ceiling light
 Access to engine
 Access to hot water tank
 Opening hull port with curtain/drape
 Opening coachroof port with curtain/drape
 Roof port
 Opening deck port
 Night blind
 Stowage unit
 Settee
 Stowage shelf 0,26 x 0,82 x 0,18 m (10" x 2' 8" x 7")
 Carpet-covered sole
 Bedhead spotlight
 Hulllining : rotproof fabric
 Headlining : light-coloured rotproof fabric
 Door leading to saloon with access-door to aft head portside
 Headroom : 1,87 m (6' 1,5")

After head


Moulded laminate unit comprising stainless steel washbasin diam. 30 cm (1') with stainless steel tap/faucet
 Pressurised hot and cold water
 Marine WC with pump
 Grab-rail built into the unit
 Stowage locker beneath the wash-basin unit
 Toilet roll-holder
 Shower basin
 Drainage by hand-pump
 Opening hull port with curtain/drape
 2 stowage lockers with doors, mirror
 12-volt power socket
 Striplight
 Dome ceiling light
 Pressurised hot and cold water supply to shower
 Door leading to aft cabin and saloon with louvred air vent
 Headroom : 1,88 - (6' 2")

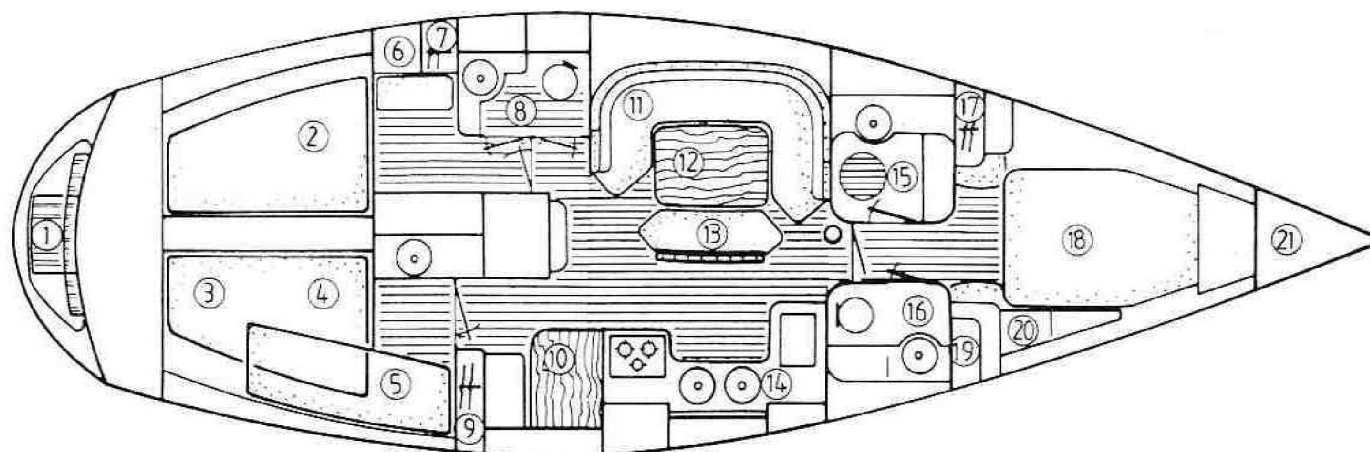

- | | | |
|---|-----------------------|--|
| 1 Teak-battened transom extension | 8 After head | 15 Forward cabin shower compartment |
| 2 Double berth aft cabin portside | 9 Hanging locker | 16 Forward cabin toilet compartment |
| 3 Double berth aft cabin starboard side | 10 Navigation station | 17 Hanging locker |
| 4 Diesel tank compartment | 11 Saloon settee | 18 Double berth in owner's cabin forward |
| 5 Single bunk berth | 12 Saloon table | 19 Stowage unit |
| 6 Stowage unit with shelving aft cabin | 13 Saloon settee | 20 Stowage shelf |
| 7 Hanging locker | 14 Galley | 21 Chain locker |

DECK LAYOUT - TEAM AND OWNER'S

- 1 Stemhead fitting with bow-rollers, chainstop forestay chainplate, genoa tack chainplate
- 2 Opening forward pulpit
- 3 Forward mooring cleat
- 4 Forward cabin deck hatch
- 5 Babystay chainplate
- 6 Mast-foot pulpit, continuous ventilation through dorad vent
- 7 Spinnaker barber hauler chainplate
- 8 Fairlead
- 9 Saloon port
- 10 Genoa sheet track with teak guard
- 11 Quarter pulpit for dorad vent
- 12 Opening deck port aft cabin
- 13 Winch for mainsheet and boom downhaul
- 14 Genoa winch
- 15 Sails locker portside
- 16 Spinnaker winch
- 17 Aft mooring cleat
- 18 Aft fairlead
- 19 Chain locker cover
- 20 Spinnaker downhaul chainplate
- 21 Spinnaker downhaul lead
- 22 Forward head port
- 23 Mast step
- 24 Return blocks spinnaker halyard, spinnaker pole downhaul and topping lift
- 25 Mooring cleat
- 26 Mainsheet track
- 27 Gangway permitting access to the side-decks
- 28 Winch for spinnaker topping lift halyard
- 29 Double cheek-block
- 30 Cockpit cocktail table
- 31 Diesel deck fill cover (team version)
- 32 Steering wheel with compass to port engine dashboard, to starboard instrument repeater housing
- 33 Helmsman's seat with lockers
- 34 Aft pulpit
- 35 Extension built into transom with swim ladder shower facility and shore power socket

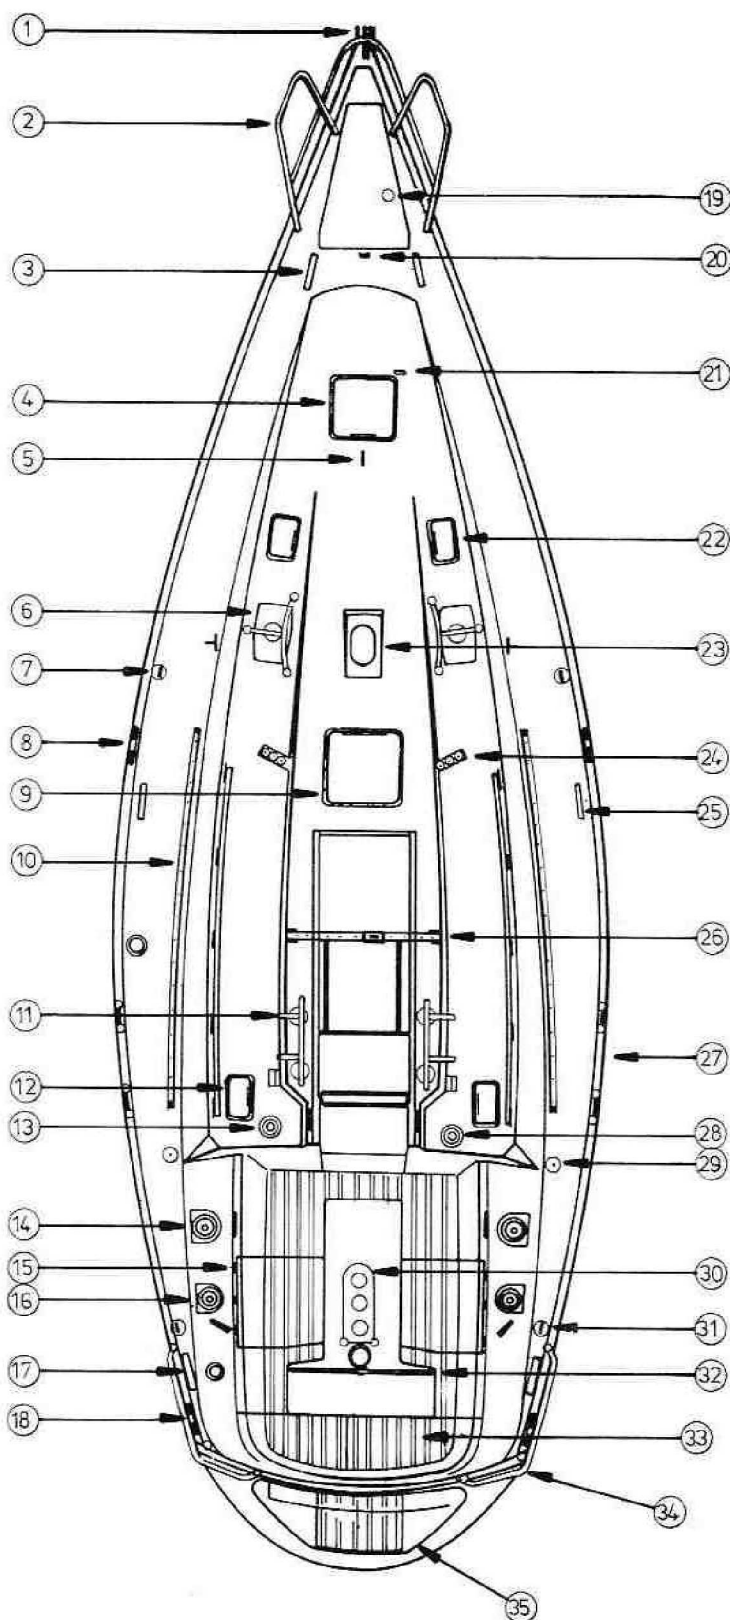

Cockpit

Helm's seat, cockpit seating and cockpit bottom of teak
Stowage lockers under the helm's seat
Aft cockpit locker portside (Life-raft) - service wiring sheath in the 3-cabin's version
Aft cockpit locker starboard side with gas bottle housing
2 winch-handle bins
2 scuppers
120 cm (3' 11") steering wheel with column-mounted compass, wheel-blocking device and emergency back-up tiller
Fold-down translucent cockpit cocktail table
Engine instrumentation dashboard built into the cockpit backrest starboard side
Dashboard to house electronic repeater built into the cockpit backrest starboard side

Cutter fittings (optional extras)

Staysail forestay ϕ 8 mm (0,31")
2 staysail sheet tracks on the coachroof
2 running backstays ϕ 8 mm (0,31")
1 staysail halyard (which is the topping lift in the spinnaker optional extras)

Spinnaker rig gear (optional extras)

2 sheets with stainless steel snap-shackles
1 halyard with stainless steel swivel-mounted snap-shackle
Downhaul with stainless steel snap-shackle
Topping lift with stainless steel snap-shackle
Spinnaker pole with cup-fitting

Mast winches

2-speed winch for mainsail clew and reefs
2-speed self-tailing winch for mainsail halyard
2-speed winch for jib halyard

Built-in transom extension

Shower facility with bathing ladder
Shore power socket on transom
Stowage locker built into the extension
Extension is teak-battened

Navigation lights

Navigation lights on bow and stern pulpits
Motoring light
Mast head lights
Deck floodlight

Capacities

4 water tanks	: 480 l. (105.58 imp.galls/126.81 US g)
1 stainless steel diesel tank	: 220 l. (48.39 imp.galls/58.12 US g)
Inboard batteries	: 1 x 160 A/h
Engine battery	: 1 x 96 A/h
Refrigerated ice-box	: 150 l. (5.29 cu. ft.)
Alternator	: 70 A/h
Hot water tank	: 41 l. (9 imp. galls/10.83 US g)

Headroom (3-cabin version)

Forward cabin	: 1,87 m (6' 1,5")
Head	: 1,87 m (6' 1,5")
Forward cabin portside	: 1,87 m (6' 1,5")
Saloon and galley	: 1,93 m (6' 4")
Companionway	: 1,93 m (6' 4")
After cabin starboard side	: 1,88 m (6' 2")
After head	: 1,88 m (6' 2")

Headroom (4-cabin version)

Forward cabin	: 1,87 m (6' 1,5")
Head	: 1,87 m (6' 1,5")
Forward cabin portside	: 1,87 m (6' 1,5")
Saloon and galley	: 1,93 m (6' 4")
Companionway	: 1,93 m (6' 4")
After cabins	: 1,88 m (6' 2")
After head	: 1,88 m (6' 2")

TEAM AND OWNER'S VERSION

Engine

Engine delivered (refer to price-list)
 Lighting of engine compartment
 Remote-control forward single-lever control on wheel
 Cockpit dashboard
 Translucent protective cover to dashboard
 Dashboard : rev. counter, oil pressure manometer, water temp. thermometer, battery charge voltmeter, hour log, fuel gauge
 Battery 96 A/h
 Foam soundproofing insulation
 Three-bladed propeller
 Access through after cabins
 Access through companionway
 Continuous ventilation
 Engine-driven blower
 Cock of quarter-turn type for sea-water uptake and filter
 Fresh water heat exchanger for the hot water tank

Also delivered

Epoxy-treated keel
 Maintenance manual
 Copper hot water piping
 Water supply through reinforced alimentary-quality flexible hose
 All waste water discharge piping is of reinforced PVC
 All cocks are of bronze with a spherical plug-valve
 Electric windlass
 3 winch handles

Standing rigging

Anodised aluminium furler mast and boom
 Mast with double level of spreaders
 Mechanical backstay turnbuckle
 Spinnaker pole track
 Stainless steel shrouding
 Sheaves for second mainsail and jib halyard
 Pendant for second spinnaker halyard
 1 forestay ϕ 9,6 mm (0,378")
 1 baby stay with turnbuckle ϕ 8 mm (0,31")
 2 cap shrouds with turnbuckles ϕ 8 mm (0,31")
 2 intermediate shrouds with turnbuckles ϕ 7 mm (0,276")
 2 lower shrouds aft ϕ 9,6 mm (0,378")
 1 backstay ϕ 9,6 mm (0,378")
 Stainless steel turnbuckles fixed to stainless steel chainplates
 Furler genoa

Running rigging

1 jib halyard
 1 mainsail halyard
 1 boom topping lift
 1 boom downhaul
 2 genoa sheets
 1 mainsheet
 Jib track adjustment
 Mainsheet track adjustment

Rudder

Epoxy-treated wooden rudder with stainless steel frame welded to the stock
 Solid stainless steel stock ϕ 50 mm (1,96")
 Fixing of rudder : stern post tube with bushing, laminated to the deck and to the hull an rudder gudgeon with bushings on the skeg

Optional extras

Lifting-keel version with hydraulic raising mechanism (see price-list)
 Teak deck (see price-list)
 Owner's version (see price-list)
 Cutter
 Spinnaker
 Lead keel
 Heating
 Shore charger
 Other optional extras on quotation



Sails

1 mainsail (furling)
 1 medium genoa (furling)
 Sail bag and battens

Construction

Safer, sturdier, the hull of the SUN ODYSSEY 44 is built using laminated glass/KEVLAR (R) composite : ARAMAT K, laid up by hand.
 The interior of the SUN ODYSSEY 44 is teak-worked

Dealer's stamp

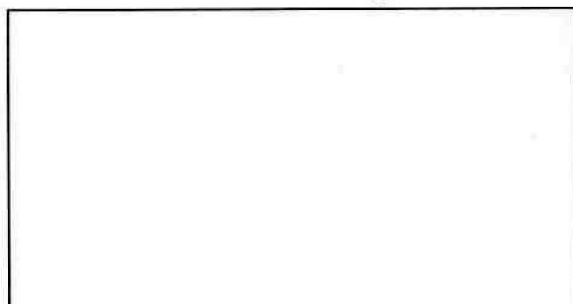

Jeanneau

Jeanneau recommends **MOTUL**