

Model year 2010 SUN ODYSSEY

Sun Odyssey 30i




Sun Odyssey 30i Performance



Sun Odyssey 33i



Sun Odyssey 33i Performance

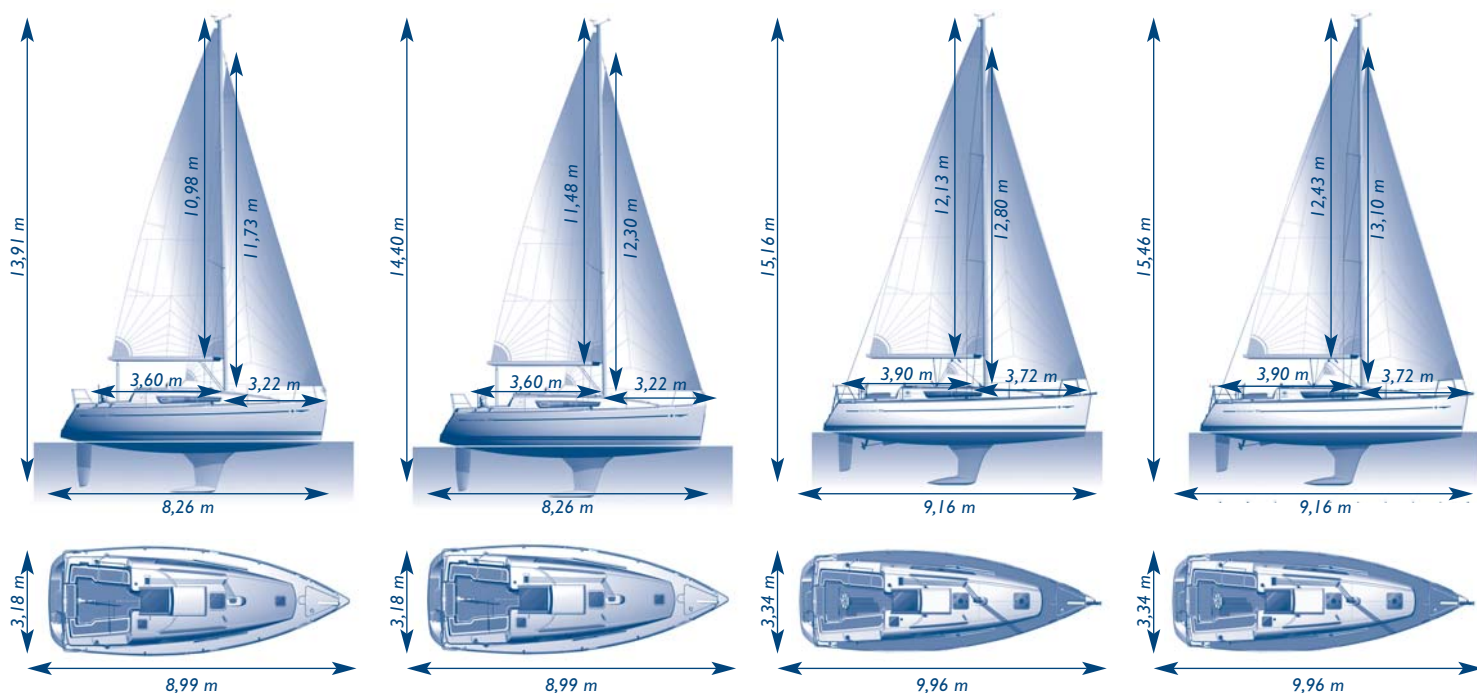

Certification conform with CE regulation.

Specifications		SO 30i	SO 30i Performance	SO 33i	SO 33i Performance
	Overall length	8,99 m	8,99 m	9,96 m	9,96 m
	Hull length	8,79 m	8,79 m	9,74 m	9,74 m
	Waterline length	8,26 m	8,26 m	9,16 m	9,16 m
	Beam	3,18 m	3,18 m	3,34 m	3,34 m
	Displacement <i>light load with deep draft keel</i>	3945 kg	3945 kg	4645 kg	4645 kg
	Standard draft <i>cast iron fin keel with elongated bulb and exterior epoxy barrier coat</i>	1,75 m	1,75 m	1,90 m	1,90 m
	Standard keel weight	946 kg	946 kg	1500 kg	1500 kg
	Shoal draft <i>cast iron fin keel with elongated bulb and exterior epoxy barrier coat</i>	-	-	1,47 m	-
	Shoal keel weight	-	-	1695 kg	-
	Swing keel version <i>galvanised centreboard located in an external iron keel fin</i>	0,85-2,00 m	-	0,85-2,20 m	-
	Swing keel weight	1039 kg	-	1516 kg	-
	Air Clearance <i>measured from waterline to top of the mast</i>	13,91 m	14,40 m	15,16 m	15,46 m
	CE category <i>(*swing keel version of Sun Odyssey 30i with furling mast C6 - swing keel version of Sun Odyssey 33i B6)</i>	B6*	B6	A6 / B8*	A6 / B8
	Architect/designer	M. Lombard	M. Lombard	M. Lombard	M. Lombard
	Water capacity	160 L	160 L	160 L	160 L
	Fuel <i>rotomolded tank located under aft berth with deck fill</i>	50 L	50 L	140 L	140 L
	Holding tank <i>rotomolded tank located in head compartment with valve for overboard discharge via gravity and deck fitting for pump out</i>	85 L	85 L	85 L	85 L
	Fridge <i>fridge compartment with vertical access</i>	100 L	100 L	100 L	100 L

Sails	Classic mainsail <i>80% battened, polyester sailcloth, Rutgerson® stainless steel eyes and 2 reinforced reef points with auto reef</i>	22,2 m²	-	26,5 m²	-
	Furling genoa <i>115% high-tenacity Dacron cloth, UV luff protection, Rutgerson® stainless steel eyes</i>	20,8 m²	-	25 m²	-
	Performance mainsail <i>, semi-full batten, Prestige series tri-radial with sandwich construction of double taffeta layers and Mylar for form stability, 2 automatic reefs</i>	-	23,4 m²	-	27,6 m²
	Performance furling genoa <i>tri-radial Prestige series with sandwich constructions of double taffeta layers and Mylar for form stability and UV luff protection, Rutgerson® stainless steel eyes</i>	-	20,8 m²	-	27,7 m²
	Furling mainsail (optional) <i>polyester sailcloth, UV luff protection, Rutgerson® stainless steel eyes</i>	21,5 m²	-	25,7 m²	-
	Spinnaker <i>optimal size for boat (not available from Jeanneau)</i>	75 m²	75 m²	100 m²	100 m²
	Total sail area <i>for standard mast and sails</i>	43 m²	44,2 m²	51,5 m²	55,3 m²

■ Standard □ Option - Not available

		SO 30i	SO 30i Performance	SO 33i	SO 33i Performance
Sail Handling	Lazy bag in Sunrella® Captain Navy fabric with integrated lazy jacks	■	■	■	■
	Genoa winches 2 x Harken 35.2 self-tailing winches	■	-	■	-
	Coachroof winch 1 x Harken 20.1 self-tailing winch	■	-	■	-
	Coachroof winch 1 x Harken 35.2 self-tailing winch	-	■	-	■
	Genoa winches 2 x Harken 40.2 self-tailing winches	-	■	-	■
	Genoa tracks adjustable lead cars	■	-	■	-
	Turning blocks for genoa sheets	■	■	■	■
	Harken genoa tracks ball-bearing cars with control lines lead aft to cockpit	-	■	-	■
	Winch handle 1 x Harken handle with ball-bearing grip	■	■	■	■
	Line jammers Spinlock, on coachroof	■	■	■	■
	Mainsheet attached to padeye in cockpit for easy use and can be removed when in port	■	-	-	-
	Mainsheet attached to padeyes forward of companionway hatch with sheet lead back to cockpit winch	-	-	■	-
	Mainsheet traveller cockpit-mounted Harken traveller with ball-bearing cars and fine tune	-	■	-	■
	Spinnaker deck hardware 2 x jammers on coachroof, 3-sheave return block on deck, padeyes on side decks	PREMIERE	PREMIERE	PREMIERE	PREMIERE
	Asymmetrical spinnaker gear halyard, 2 sheets, tack line lead forward on deck, 3 blocks	□	□	□	□
	Symmetrical spinnaker gear halyard, 2 sheets, pole uphaul and downhaul, spinnaker pole, and necessary blocks	□	□	□	□
Mast and Rigging	Selden classic mast aluminium with double spreaders, deck-stepped	■	-	■	-
	Selden performance classic mast aluminium with double spreaders, 9/10th fractional	-	■	-	■
	Standing rigging discontinuous 1x19 stainless steel wire	■	■	■	■
	Backstay fixed	■	-	■	-
	Backstay adjustable via a block and tackle system 1:16	-	■	-	■
	Genoa furler with attachment to stemhead fitting and furling line lead aft to roof winch	■	-	■	-
	Genoa furler Profurl racing series with removable drum, double sail slot and aerodynamic profile, furling line lead aft to roof winch	-	■	-	■
	Running rigging topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets	■	-	■	-
	Dyneema® Running rigging mainsail halyard, genoa halyard, mainsheet with fine tune, genoa sheets, polyester boom topping lift	-	■	-	■
	Boom vang block and tackle system	■	-	■	-
	Rigid boom vang with gas cylinder and control line lead aft to the cockpit	-	■	-	■
	Anchor light and tricolour at masthead, steaming light and bicolour running light on leading edge of the mast	■	■	■	■
Cockpit & Deck Storage	Wood inlay on cockpit bench seating	■	■	■	■
	Wood cockpit floor inlay	□	□	□	□
	Wood side decks	-	-	□	□
	Cockpit locker 1 large cockpit locker to starboard under bench seat and separate gas locker on stern	■	■	■	■
	Liferaft locker located in dedicated compartment in stern	■	■	■	■
	Cockpit table removable on aluminium base (tiller version)	□	□	-	-
	Cockpit table large folding table mounted on stainless steel base	-	-	PREMIERE	-
	Cockpit table folding table mounted on pedestal	□	□	-	PREMIERE
	Tiller varnished wood tiller with extension handle, folds out of the way to keep cockpit clear	■	■	-	-
	Wheel leather-covered steering wheel mounted on steering pedestal with grabrail and pod for instrumentation	□	□	■	■
	Compass	■	■	■	■
	Transom seat folding seat for easy access to the transom	■	■	■	■
	Engine controls throttle and engine control panel, warning lights, ignition protected by a plexiglass panel	■	■	■	■
	Swim ladder stainless steel folding ladder mounted on transom step	■	■	■	■
	Cockpit shower retractable cold water shower with tap	PREFERENCE	PREFERENCE	-	-
	Cockpit shower retractable hot and cold water shower with tap	-	-	PREFERENCE	PREFERENCE
	Cockpit cushions Sunbrella® Captain Navy cushions for seating area with attachment clips	□	□	□	□
	Cockpit sprayhood wide Sunbrella® Captain Navy with vinyl windscreen	□	□	□	□
	Cockpit bimini Sunbrella® Captain Navy with stainless steel bows, retractable with storage cover	□	□	□	-
	Anchor locker forward, room for anchor and tackle	■	■	■	■

■ Standard □ Option - Not available

		SO 30i	SO 30i Performance	SO 33i	SO 33i Performance
Deck Hardware	Bow pulpit stainless steel	■	■	■	■
	Stern pulpits stainless steel with buoy bracket	■	■	■	■
	Outboard engine bracket mounted on stern pulpit	□	□	□	□
	Windlass 700 W combination rope and chain 8 mm, vertical-mounted in the anchor locker, hand-held remote, manual handle	□	□	-	-
	Windlass 1000 W combination rope and chain 10 mm, vertical-mounted in the anchor locker, hand-held remote, manual handle	-	-	□	□
	Anchor roller single roller	■	■	■	■
	Anchoring kit fluke anchor 14 kg with 23 meters of 8 mm chain and 35 meters of 14 mm line	□	□	-	-
	Anchoring kit fluke anchor 16 kg with 28 meters of 10 mm chain and 40 meters of 18 mm line	-	-	□	□
	Lifelines double level of stainless steel lifelines, stainless steel stanchions	■	■	■	■
	Toerail wood profile	■	■	■	■
	Cleats 4 x aluminium mooring cleats forward and aft	■	■	■	■
	Mooring kit 6 fenders and 4 docklines	□	□	□	□
	Handrails sculpted, long wood handrails on coachroof for secure movement forward	■	■	■	■

Technical features and options	Construction	Deck Prisma Process® injected deck, ISO gelcoat surface, discontinuous balsa block coring	■	■	■	■
		Hull solid, hand-laid fibreglass, ISO gelcoat surface, protective barrier coat	■	■	■	■
		Structure inner fibreglass grid, high-load zones cut out, drainage system through structure	■	■	■	■
	Lights	Flush mounted chromed brass ceiling lights in saloon and cabins	■	■	■	■
		Reading lights in cabins	■	■	■	■
		Gooseneck chart light mounted at nav station	■	■	■	■
	Electrical Circuit	12v alternator output	55 A	55 A	55 A	55 A
		Battery 70 Ah for domestic bank with charge distributor/isolator	PREMIERE	PREMIERE	■	■
		Extra 70 Ah for domestic battery	-	-	PREMIERE	PREMIERE
		Engine start/domestic battery capacity	70 Ah	70 Ah	70 Ah	70 Ah
		Battery switches for engine bank, positive battery switch for domestic bank (when option is fitted) and negative general cut-off switch	■	■	■	■
		230 v shore power inlet with differential breaker, one 230 v plug per cabin, galley and saloon + 25 A Cristec charger	PREMIERE	PREMIERE	PREMIERE	PREMIERE
	Plumbing	Pressurised water distributed through-out the boat via semi-rigid hose	■	■	■	■
		“Heavy-duty” water pump and accumulator tank for consistent water pressure	■	■	■	■
		20 litre hot water tank that is connected to engine heat exchanger and 230v system (when 230 v shorepower system fitted)	PREMIERE	PREMIERE	■	■
		Manual bilge pump in the cockpit	■	■	■	■
		Chromed shower faucets in washroom	■	■	■	■
		Shower sumps equipped with individual electric pumps with filters and on-off switches	■	■	■	■
	Engine	Manual pump marine toilets	■	■	■	■
		Yanmar 3YM20 21 HP , 15.3 Kw with heat exchanger, latest generation of environmentally friendly engines	■	■	■	■
		Fully soundproofed engine compartment with engine access behind stairwell and from aft cabin	■	■	■	■
		Stainless steel propeller shaft 25 mm diameter and maintenance free stuffing box	■	■	■	■
		Fuel/water separator	■	■	■	■
		Built-in muffler, air ventilation and stainless steel exhaust fitting aft	■	■	■	■
		Fixed 3-blade bronze propeller	■	-	■	-
		Folding 3-blade propeller	-	■	□	■

Comfort features and options	Fixed windows along coachroof with integrated opening ports	■	■	■	■
	Pleated curtain kit with integrated insect screens for hatches	PREFERENCE	PREFERENCE	PREFERENCE	PREFERENCE
	Opening cockpit and roof ports	2	2	2	2
	Opening cockpit port into aft cabin	1 x PREMIERE	1 x PREMIERE	2 x PREMIERE	2 x PREMIERE
	Opening deck hatch in saloon	■	■	■	■
	Opening deck hatch in forward cabin	■	■	■	■
	Opening deck hatch in aft cabin	■	■	■	■
	CD/radio player in saloon with 2 speakers in saloon	PREFERENCE	PREFERENCE	PREFERENCE	PREFERENCE
	Cockpit speakers watertight	PREFERENCE	PREFERENCE	PREFERENCE	PREFERENCE
	Forced air heating 1 unit 3900 BTU Webasto® diesel heater installed in cockpit lazarette, vents in forward cabin, aft cabin and saloon	-	-	□	□

■ Standard □ Option - Not available

		SO 30i	SO 33i
		2C11H	2C11H
Interior features and options	Wood		
	Fine Teak® laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish	■	■
	Laminate floorboards laminated floorboards with light-coloured lines and sealed edges	■	■
	Forward cabin with V-berth	■	■
	Double berth with high-density foam mattress	2,1 x 1,82 m	2 x 1,80 m
	Storage locker under berth	■	■
	Cabinet with hanging rod	■	■
	Storage cabinet with shelves	-	■
	Wide, bi-fold door for easy access	■	■
	Vinyl lining on hull with lateral wood shelf	■	■
	Reading light	■	■
	Aft cabin	■	■
	Double berth with high-density foam mattress	1,92 m x 1,40 m	2,10 x 2 m
	Deep cabinet with shelves and hanging rod	■	■
	Vinyl lining on hull with lateral wood shelf	■	■
	Reading light	■	■
	Head compartment accessible from saloon with sink, storage cabinet, clothes hook, towel holder, toilet paper holder, shower sump with electric drainage pump	■	■
	Wet locker	■	■
	Navigation station	■	■
	Full-featured electrical panel with spare breakers, voltmeter and 12v plug	■	■
	Sliding nav desk that can be placed in forward-facing or aft-facing position for increased seating with storage underneath	-	■
	Aft-facing nav station, seating on bench seat	■	-
	Navigation desk with storage	■	■
	Saloon with seating, cushions and storage under seating area	■	■
	Folding saloon table with fiddles	■	■
	Bottle storage compartment in table	■	■
	Cushion to fit under nav desk to convert portside settee to single berth	<input type="checkbox"/>	PREFERENCE
	Upper storage cabinets	■	■
	Companionway with 4 varnished wood steps	■	■
Galley	Galley with laminated countertops, chrome plumbing fittings, storage cabinets	■	■
	L-galley to starboard with round stainless steel sink 100 L, icebox and cutlery storage	■	■
	12v compressor under stove with evaporator plate located in fridge compartment	PREMIERE	■
	2-burner stove (for Sun Odyssey 33i this stove is used when microwave option is ordered)	■	<input type="checkbox"/>
	Gimballed 2-burner stainless steel with oven with stainless steel protection bar (not compatible with microwave option)	<input type="checkbox"/>	■
	Microwave oven (not compatible with oven option)	<input type="checkbox"/>	<input type="checkbox"/>
	Luxury 2-burner stove with black finish, wood handle, stainless steel oven/broiler	-	<input type="checkbox"/>
Headroom	Forward cabin	1,83 m	1,86 m
	Aft cabin	1,90 m	1,89 m
	Companionway	1,87 m	1,88 m
	Saloon	1,82 m	1,85 m
	Galley	1,87 m	1,89 m

■ Standard ☐ Option - Not available C = Cabins H = Head

